



WASQS SMA to Quick SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar


Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC
Impedance:	50Ω

Mechanical

RF Connectors:	SMA Quick SMA
Outer Conductor:	Gold plated brass or Gold plated beryllium copper
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

Outline Drawings

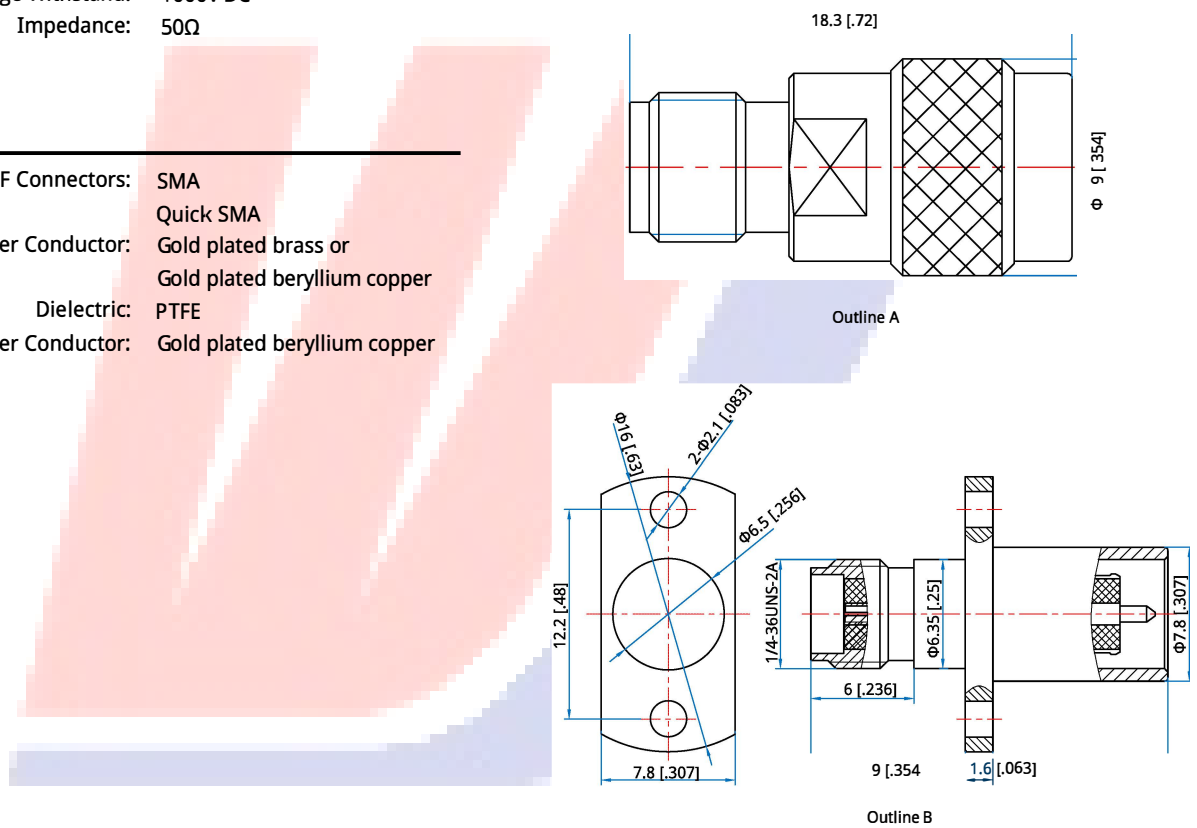

Unit: mm [in]
Tolerance:±0.2mm [±0.008in]

How To Order

WASQS-FM-B - SMA (f) to Quick SMA (m), Outline A

WASQSL-FM-B - SMA (f) to Quick SMA (m), flange mount, Outline B

Customization is available upon request.