




QAV3

1.85mm to 3.5mm

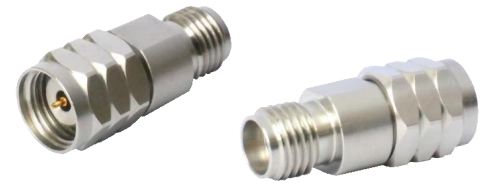

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~33GHz
VSWR: 1.15 max.
Impedance: 50Ω

Mechanical

RF Connectors: 1.85mm
3.5mm
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated Stainless Steel
Dielectric: PEI
Inner Conductor: Gold Plated Beryllium Copper

Environmental


Temperature: -55~+125°C

How To Order

- WAV3-MM** - 1.85mm(m) to 3.5mm(m), Outline A
- WAV3-MF** - 1.85mm(m) to 3.5mm(f), Outline B
- WAV3-FM** - 1.85mm(f) to 3.5mm(m), Outline C
- WAV3-FF** - 1.85mm(f) to 3.5mm(f), Outline D

Customization is available upon request.

Outline Drawings

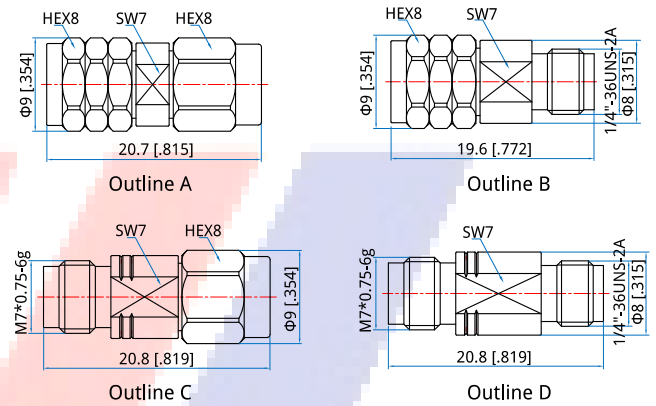

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]