



WASN

SMA to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~18GHz
VSWR: 1.15 max.
Impedance: 50Ω

Mechanical

RF Connectors: SMA
N
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated stainless steel
Dielectric: PEI&PTFE
Inner Conductor: Gold plated brass or Gold plated beryllium copper

Environmental


Temperature: -50~+85°C

How To Order

- WASN-MM** - SMA (m) to N (m), Outline A
- WASN-MF** - SMA (m) to N (f), Outline B
- WASN-FM** - SMA (f) to N (m), Outline C
- WASN-FF** - SMA (f) to N (f), Outline D
- WASNL-FF** - SMA (f) to N (f) flange mount, Outline E
- WASNH-FF-1** - SMA (f) to N (f) bulk head, Outline F
- WASNH-FF-2** - SMA (f) to N (f) bulk head, Outline G

Customization is available upon request.

Outline Drawings

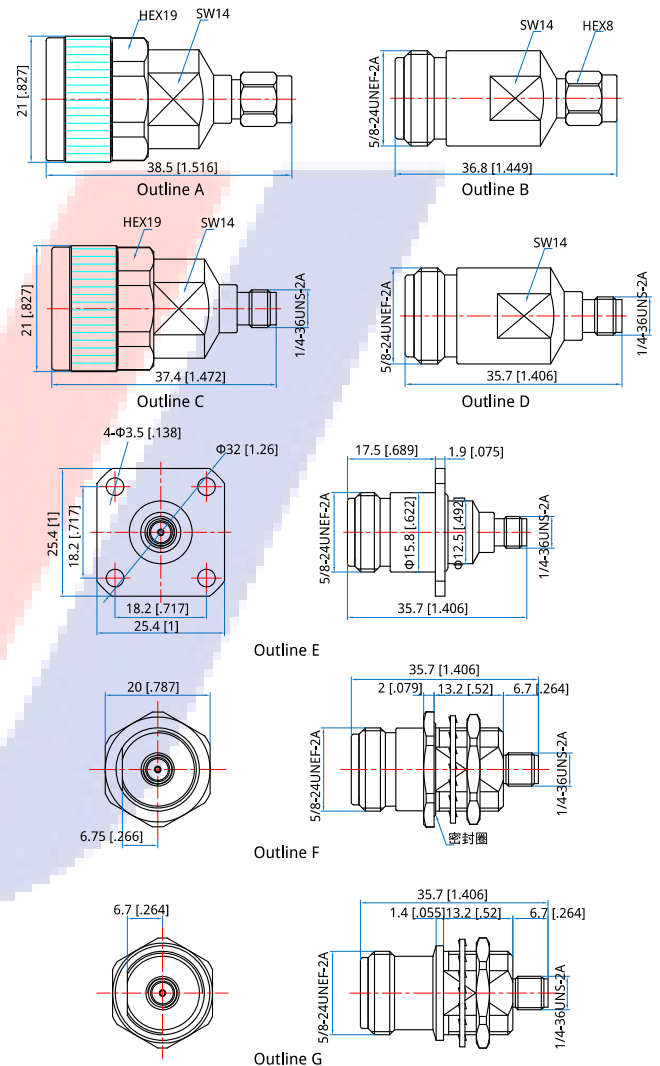

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]