



WASM

SMA to MCX

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~6GHz
VSWR: 1.2 max.
Impedance: 50Ω

Mechanical

RF Connectors: SMA
MCX
Mating Life Cycle: 500 cycles
Outer Conductor: Gold Plated Brass
Dielectric: PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental


Temperature: -55~+165°C

How To Order

- WASM-MM** - SMA(m) to MCX(m), Outline A
- WASM-MF** - SMA(m) to MCX(f), Outline B
- WASM-FM** - SMA(f) to MCX(m), Outline C
- WASM-FF** - SMA(f) to MCX(f), Outline D
- WASM-FM-1** - SMA(f) to MCX(f), Outline E
- WASM-FF-1** - SMA(f) to MCX(f), Outline F

Customization is available upon request.

Outline Drawings

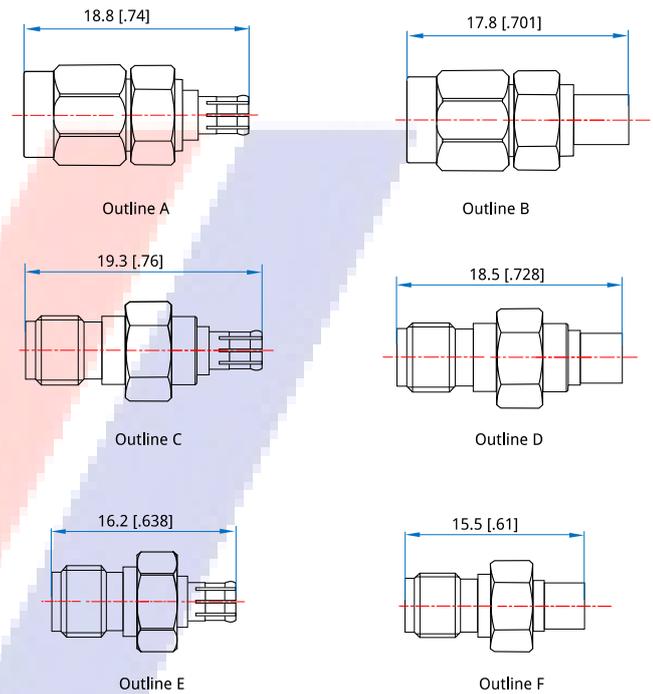

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]