



WASN-B6

SMA to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC-6GHz
VSWR: 1.15 max.
Impedance: 50Ω


Mechanical

RF Connectors: SMA
N
Mating Life Cycle: 500 cycles
Outer Conductor: Ternary alloy plated brass
Dielectric: PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+165°C

Outline Drawings

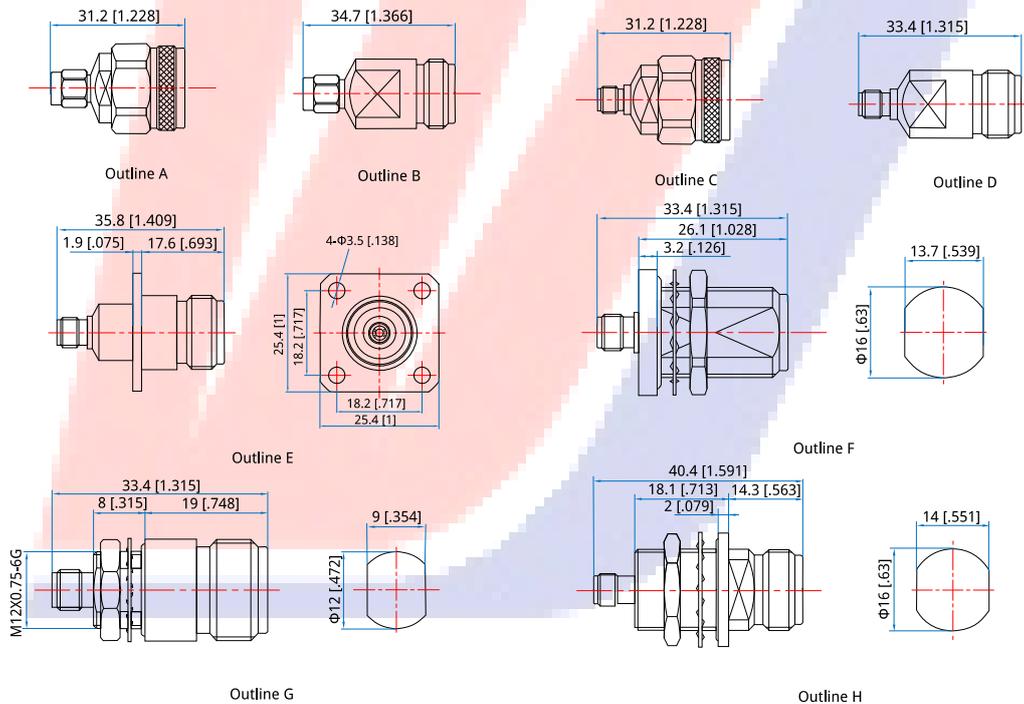

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

WASN-MM-B6 - SMA (m) to N (m), Outline A

WASN-MF-B6 - SMA (m) to N (f), Outline B

WASN-FM-B6 - SMA (f) to N (m), Outline C

WASN-FF-B6 - SMA (f) to N (f), Outline D

WASN-L-FF-B6 - SMA (f) to N (f) flange mount, Outline E

WASN-H-FF-B6 - SMA (f) to N (f) bulk head, Outline F

WASN-H-FF-B6-1 - SMA (f) to N (f) bulk head, Outline G

WASN-H-FF-B6-2 - SMA (f) to N (f) bulk head, Outline H

Customization is available upon request.