



WAS4

SMA to 4.3/10

Features:

* Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar


Electrical

Frequency: DC~6GHz
 VSWR: 1.15 max. @DC~3GHz
 Impedance: 50Ω

Mechanical

RF Connectors: SMA
 4.3/10
 Outer Conductor: Silver plated phosphor bronze
 Dielectric: PTFE
 Inner Conductor: Silver plated phosphor bronze
 Silver plated brass/beryllium copper

Outline Drawings

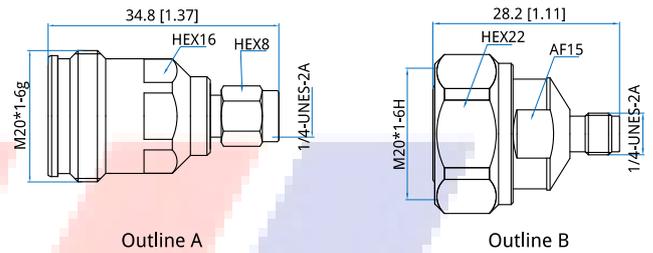

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

WAS4-MF - SMA(m) to 4.3-10(f), Outline A

WAS4-FM - SMA(f) to 4.3-10(m), Outline B

Customization is available upon request.