



WPD2-100-520-2K-7N

2-Way, 0.1~0.52GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.1~0.52GHz
Insertion Loss:	0.6dB max.
Input VSWR:	1.35 max.
Output VSWR:	1.35 max.
Isolation:	15dB min.
Amplitude Balance:	0.3dB
Phase Balance:	5°
Impedance:	50Ω
Power @SUM Port:	2000W max. as divider 2000W max. as combiner

Mechanical

Size*1:	197*160*66mm 7.756*6.299*2.598in
Connectors:	7/16 DIN Female N Female
Mounting:	4-Φ4.2mm through-hole


[1] Exclude connectors.

How To Order

WPD2-100-520-2K-7N

Customization is available upon request.

Outline Drawings

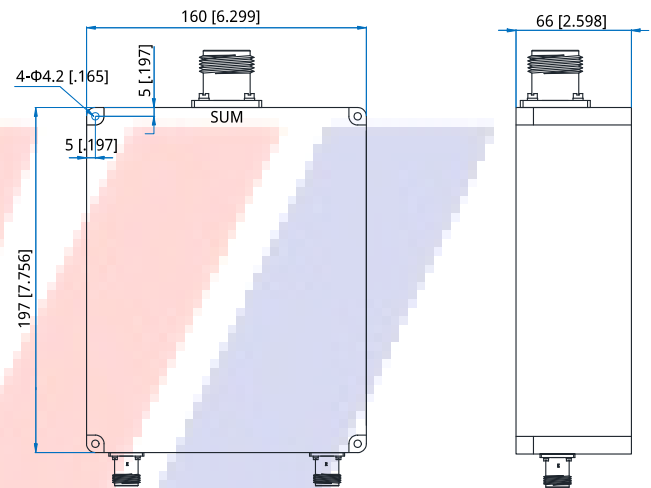

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]