



## WPD2-300-18000-30-S

2-Way, 0.3~18GHz

Features:  
\* Small Size  
\* Low Insertion Loss

Applications:  
\* Amplifiers  
\* Mixers  
\* Antennas  
\* Laboratory Test

### Electrical

Frequency:	0.3~18GHz
Insertion Loss:	2.4dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.5 max.
Isolation:	18dB min.
Amplitude Balance:	±0.3dB max.
Phase Balance:	±4° max.
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 5W max. as combiner

### Mechanical


Size*1:	216.5*25.8*12.7mm 8.524*1.016*0.5in
Connectors:	SMA Female
Mounting:	6-Φ2.6mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

### Outline Drawings

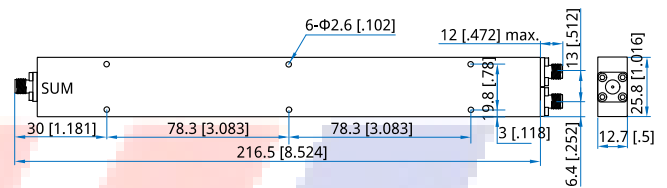

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

### How To Order

**WPD2-300-18000-30-S**

Customization is available upon request.